

● PRINTER RUSH ●
(PTO ASSISTANCE)

Application : <u>10/088 662</u>	Examiner : <u>Chapman</u>	GAU : <u>3761</u>
From: <u>Ut</u>	Location: <u>(IDC) FMF FDC</u>	Date: <u>6-10-05</u>

(2)

Tracking #: 6087349
6087349

Week Date: 3-14-05

DOC CODE	DOC DATE	MISCELLANEOUS
<input type="checkbox"/> 1449	_____	<input type="checkbox"/> Continuing Data
<input type="checkbox"/> IDS	_____	<input type="checkbox"/> Foreign Priority
<input type="checkbox"/> CLM	_____	<input type="checkbox"/> Document Legibility
<input type="checkbox"/> IIFW	_____	<input type="checkbox"/> Fees
<input type="checkbox"/> SRFW	_____	<input type="checkbox"/> Other
<input checked="" type="checkbox"/> DRW	<u>3/20/02</u>	
<input type="checkbox"/> OATH	_____	
<input type="checkbox"/> 312	_____	
<input type="checkbox"/> SPEC	_____	

[RUSH] MESSAGE:	<u>Attention Chief Draftsperson: Figures 1 - 4 all have</u> <u>Foreign Figure labels</u>
	<u>Please resolve</u>
	<u>Thank</u> <u>Ut</u>

[XRUSH] RESPONSE:	<u>Corrected drawings</u>
	INITIALS: <u>WJS</u>

NOTE: This form will be included as part of the official USPTO record, with the Response document coded as XRUSH.
REV 10/04

FIG. 1

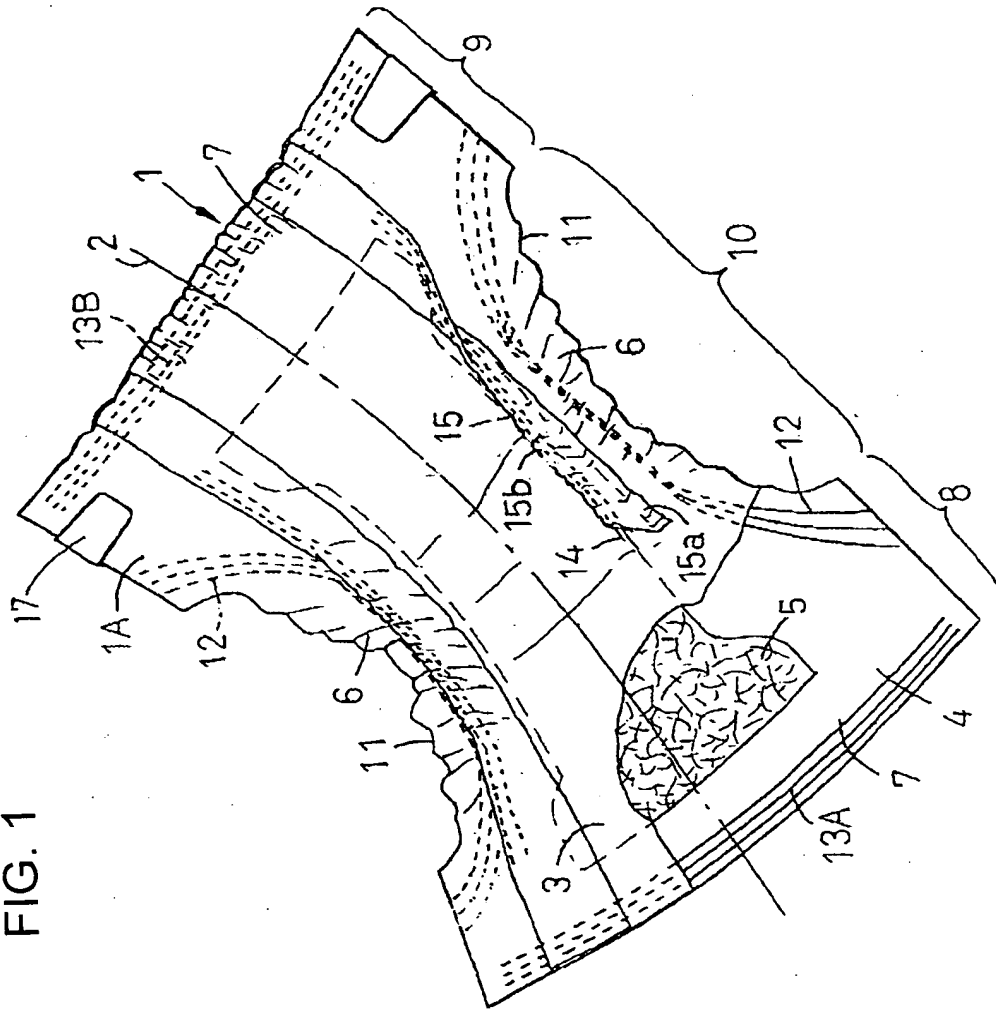


FIG. 1 is a schematic cross-sectional view of a magnetic head assembly. The assembly consists of a central core (5) surrounded by a coil (70). The entire assembly is mounted on a substrate (8). The substrate (8) includes a base layer (13A), a gap layer (9), and a top layer (13B). A gap (D) is formed between the core (5) and the substrate (8). A distance S is indicated between two points on the substrate (8). Arrows B and F indicate forces or fields acting on the core (5).

13A

FIG. 3

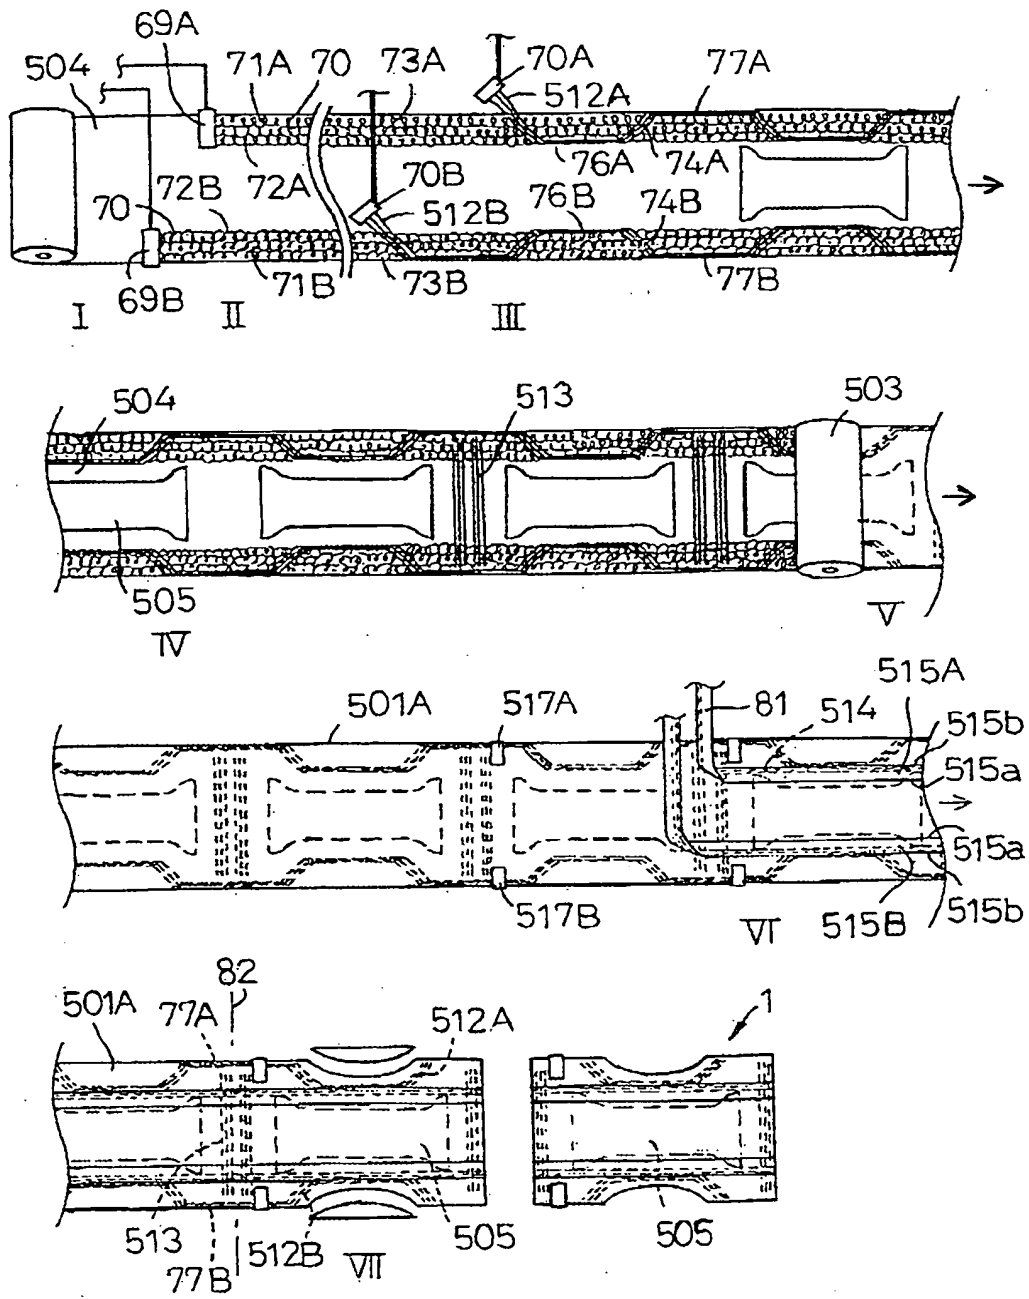


FIG. 4

